

ABOVEGROUND DOMESTIC TANKS



GENERAL SPECIFICATIONS

Designed and built to ASME Section VIII, Division 1
Complies with NFPA 58 & registered with national board
Rated at 250 PSI from -20° to 125°F
Vacuum purged - Ready to fill
Choice of Rego or Cavagna valves
Rochester liquid level gauges standard with steel gears and snap on dial
Superior powder coated finish
Aboveground steel galvanized domes included with purchase
Boom crane delivery standard

Standard WG offering: 120 - 2000 WG


Standard colors: WHITE / TAN / GRAY

Custom colors: AVAILABLE



2999 Olympus Blvd
Suite 450
Dallas, TX 75019

888 558 8225
customerservice@triarccorp.com

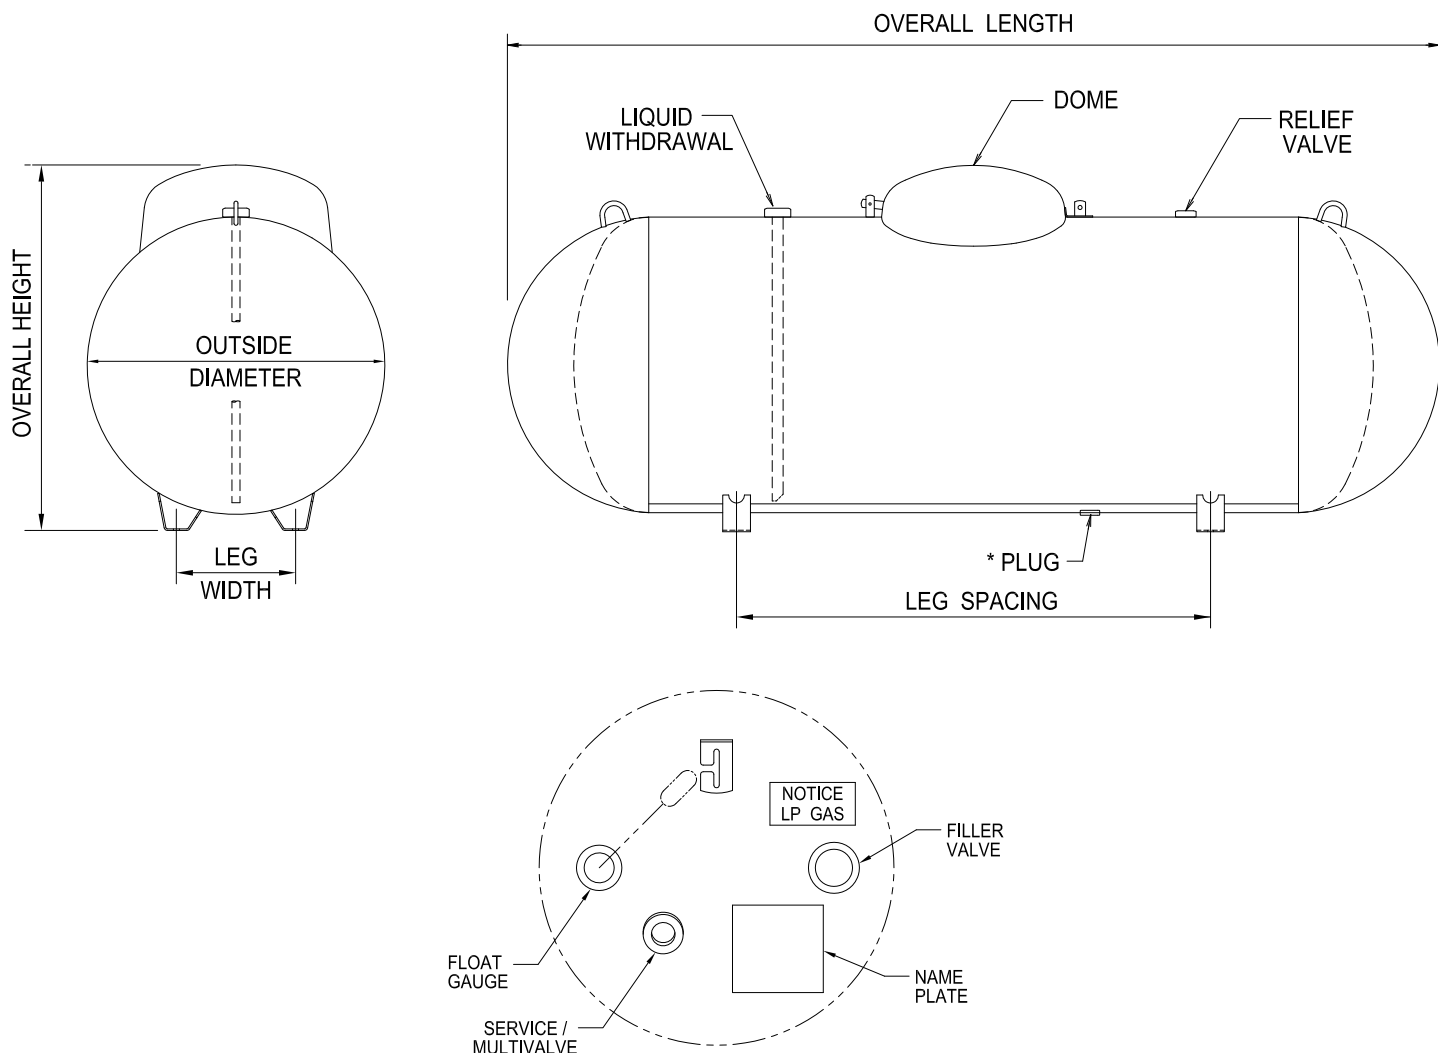

ABOVEGROUND VESSEL DIMENSIONAL INFORMATION

Water Capacity	Outside Diameter	Head Type	Overall Length	Overall Height	Leg Width	Leg Spacing	Weight	Quantity	
								Full Load	Per stack
*120 wg.	24"	Ellip	5' - 5 13/16"	2' - 8 1/4"	10 1/8"	3' - 0"	245 lbs.	96	12
*250 wg.	31.5"	Hemi	7' - 2 1/2"	3' - 33/4"	12 3/4"	3' - 6"	472 lbs.	54	9
*320 wg.	31.5"	Hemi	8' - 11 3/4"	3' - 33/4"	12 3/4"	4' - 0 1/4"	588 lbs.	45	9
500 wg.	37.42"	Hemi	9' - 10"	3' - 9 11/16"	15"	5' - 0"	871 lbs.	30	6
1000 wg.	40.96"	Hemi	15' - 10 13/16"	4' - 1 3/8"	16 1/4"	9' - 0"	1729 lbs.	15	5
1465 wg.	46.77"	Ellip	17' - 6 7/8"	4' - 4 3/4"	21"	10' - 0"	2745 lbs.	12	4
2000 wg.	46.77"	Ellip	23' - 9"	4' - 7"	21"	14' - 0"	3676 lbs.	8	4

Liquid withdrawal opening located under the dome on the 120 WG vessel ONLY.

All vessels dimensions are approximate

*Drain plug not available